


Common Mode Choke Size 4724

采用紧凑均匀的绕线工艺，有效减低寄生电容，提高线间耐压等级
 标称额定电压250Vac; 线间绝缘测试电压1500Vac
 工作温度范围：-55 ~+125

电源线输入、输出共模噪声消减和浪涌抑制（250Vac）
 电力电源装置的浪涌抑制和EMI滤波
 浮地装置的滤波
 EMI对策用
 特别适用于AC/DC转换，DC/AC逆变等线路的电磁干扰抑制

Dimensions: [mm]

Land Pattern: [mm]

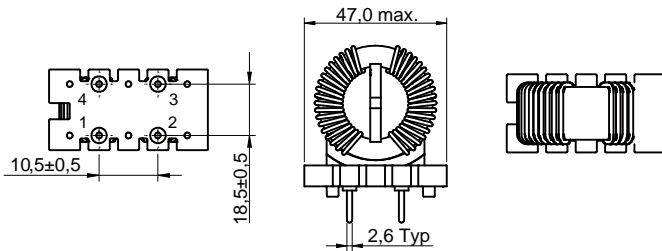


Schematic:

Electrical Properties:

| Part No. | L(μ H) \pm 30% | I _R (A) | max (m) | Vac | Vac | Core Material | Test Condition |
|--------------|-----------------------|--------------------|----------|------|-----|---------------|----------------|
| CMC4724-501N | 500 | 35 | 2.3 | 1500 | 250 | 锰锌 MnZn | 10KHz/0.25V |

Typical Electrical Characteristics:

Insertion Loss Common Mode

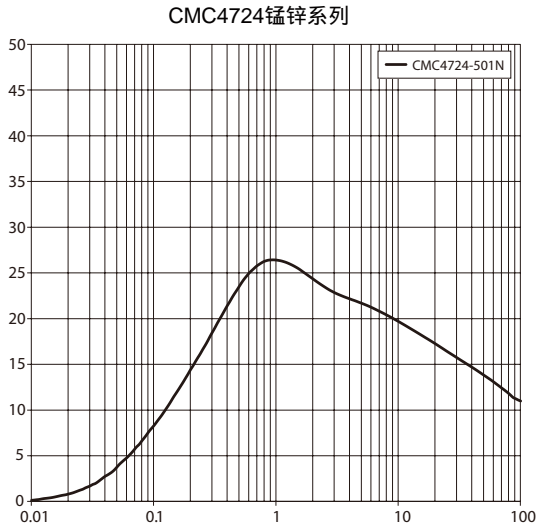


Common Mode Choke Size 4724

采用紧凑均匀的绕线工艺，有效减低寄生电容，提高线间耐压等级
 标称额定电压250Vac; 线间绝缘测试电压1500Vac
 工作温度范围：-55 ~+125

电源线输入、输出共模噪声消减和浪涌抑制（250Vac）
 电力电源装置的浪涌抑制和EMI滤波
 浮地装置的滤波
 EMI对策用
 特别适用于AC/DC转换，DC/AC逆变等线路的电磁干扰抑制

Dimensions: [mm]

Land Pattern: [mm]

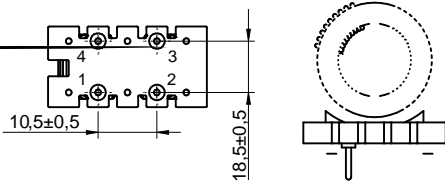

Schematic:

Electrical Properties:

| Part No. | L(μ H) \pm 30% | I _R (A) | max (m) | Vac | Vac | Core Material | Test Condition |
|----------|-----------------------|--------------------|----------|-----|-----|---------------|----------------|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Typical Electrical Characteristics:

Insertion Loss Common Mode

CMC4724锰锌系列

