

FBHE Series

SMD Suppression Ferrite Bead

Size 1206



CHARACTERISTICS



-
-
-
-
-

APPLICATION

-
-

Dimensions: [mm]

Land Pattern: [mm]

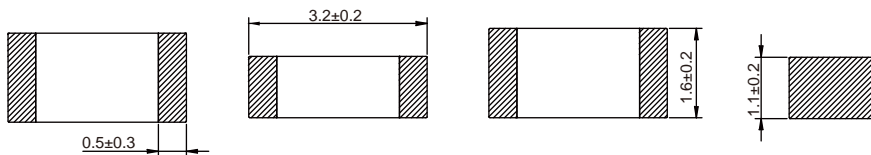

Electrical Properties:

| | () | | (max) () | Current (max) (mA) |
|-------------------|-----|--|--------------|-----------------------|
| FBHE1206-300-302R | 30 | | 0.04 | 3000 |
| FBHE1206-600-502R | 60 | | 0.02 | 5000 |
| FBHE1206-800-302R | 80 | | 0.04 | 3000 |
| FBHE1206-121-202R | 120 | | 0.10 | 2000 |
| FBHE1206-151-202R | 150 | | 0.10 | 2000 |
| FBHE1206-301-102R | 300 | | 0.20 | 1000 |
| FBHE1206-301-302R | 300 | | 0.04 | 3000 |
| FBHE1206-471-102R | 470 | | 0.20 | 1000 |
| FBHE1206-501-302R | 500 | | 0.04 | 3000 |
| FBHE1206-601-202R | 600 | | 0.10 | 2000 |
| FBHE1206-601-302R | 600 | | 0.10 | 3000 |

°C

°C

°C

Impedance & Frequency Characteristics:

