

MDA HT Series

SMD Moulded Inductor

Size 5040




FEATURES

-
- Ultra low buzz noise, due to composite construction
-
-
- AEC-Q200 qualified
- Operating temperature: -55 to +165 °C (including self-temperature rise)
- Quantity: 1500PCS


APPLICATION

- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
-
- In-Vehicle Infotainment and navigation

Dimensions: [mm]

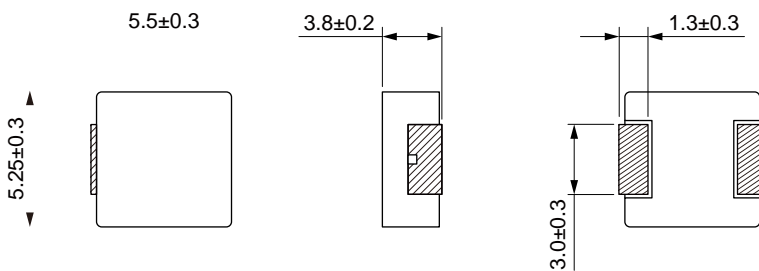

Land Pattern: [mm]



Electrical Properties:












Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)


Saturation Current will cause L to drop approximately 35%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}C$



Typical Electrical Characteristics:

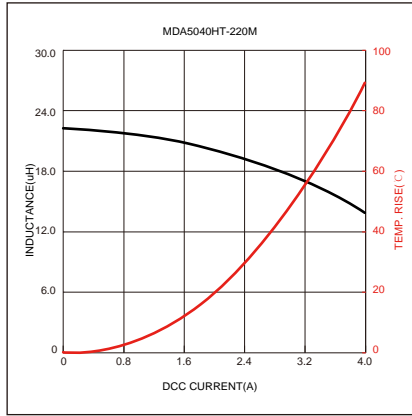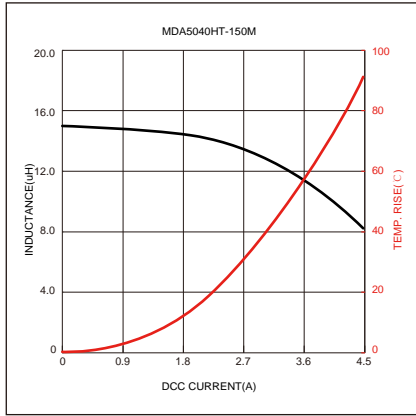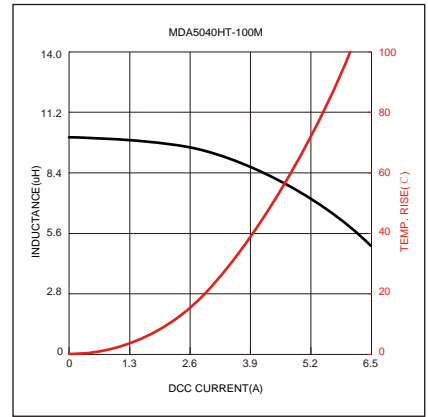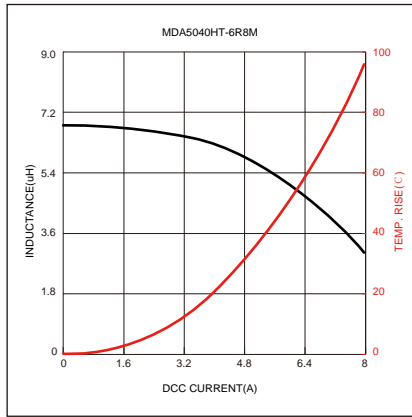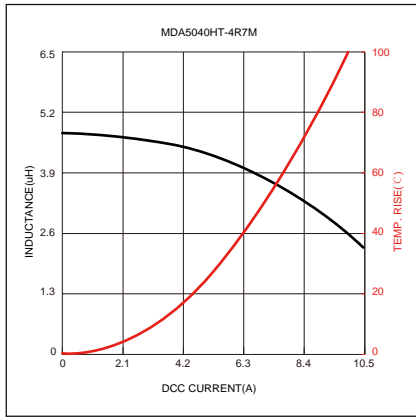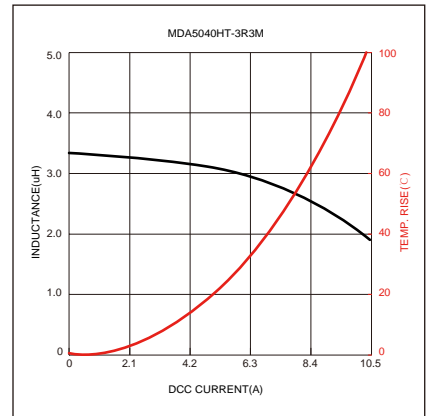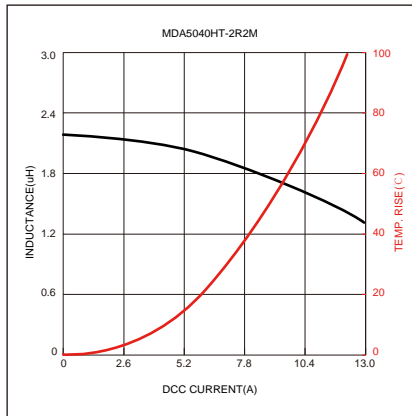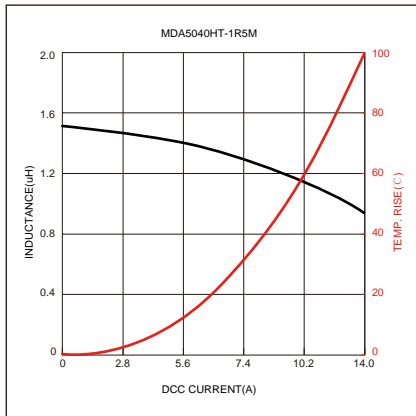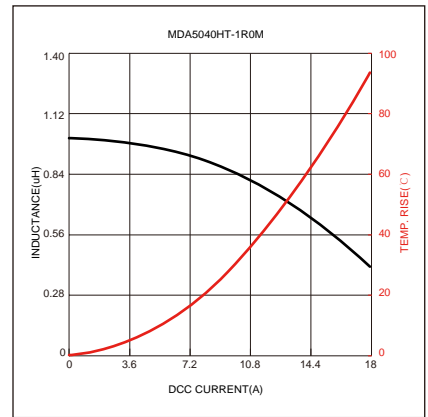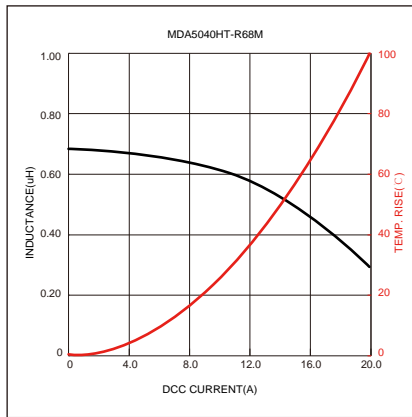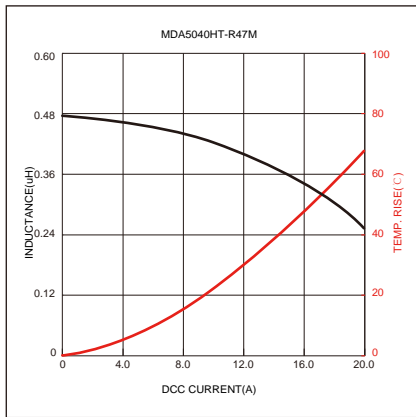





Reel Dimension: [mm] F9, No. 4188, Huaning Rd, Minhang District, Shanghai
KOHER Electronics



Packaging Quantity: