












| Part No | Inductance @ 100KHz/1V | Tolerance | Temperature Rise Current Typ. (A) | Temperature Rise Current Max. (A) | Current Typ. (A) | Current Max. (A) | DC Resistance Typ. | DC Resistance Max. |
|---------|------------------------|-----------|-----------------------------------|-----------------------------------|------------------|------------------|--------------------|--------------------|
|         |                        |           |                                   |                                   |                  |                  |                    |                    |
|         |                        |           |                                   |                                   |                  |                  |                    |                    |
|         |                        |           |                                   |                                   |                  |                  |                    |                    |





Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$


### Typical Electrical Characteristics:

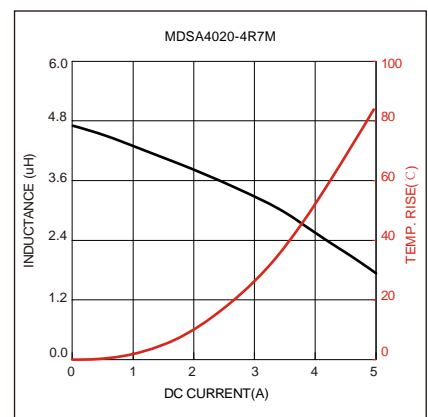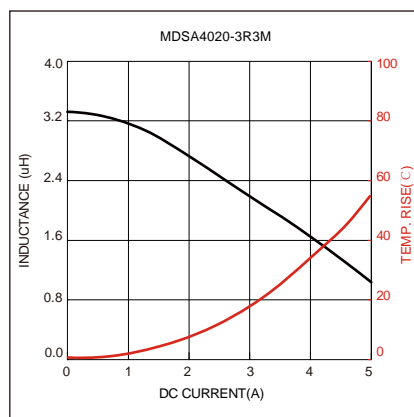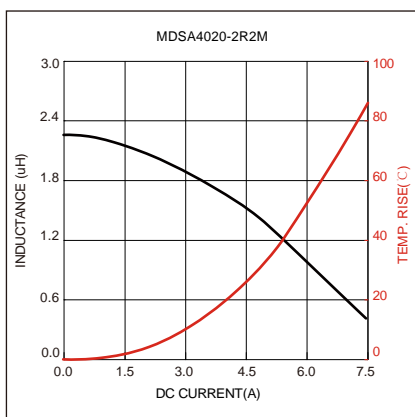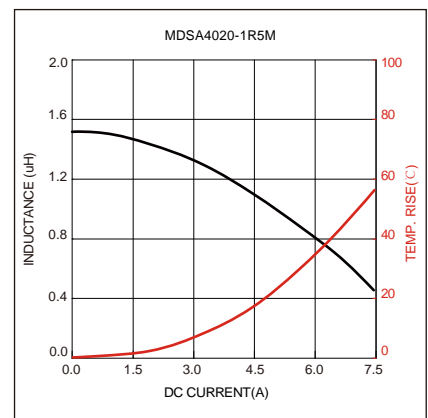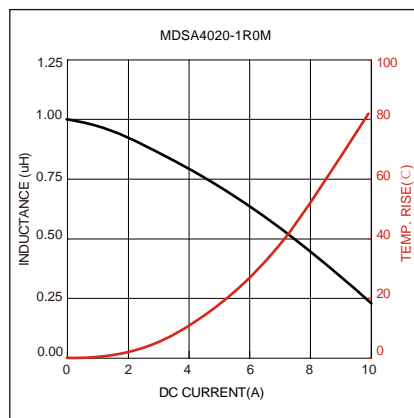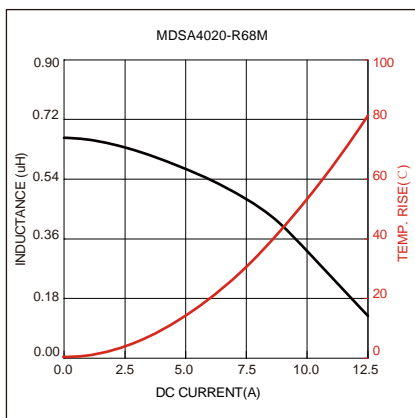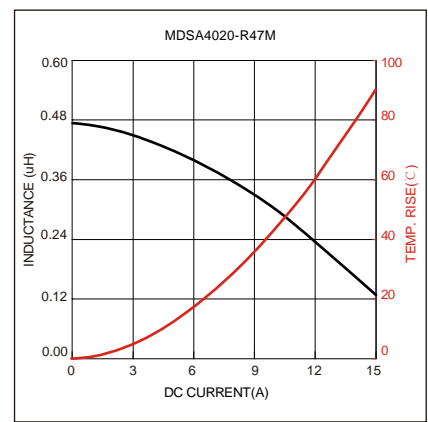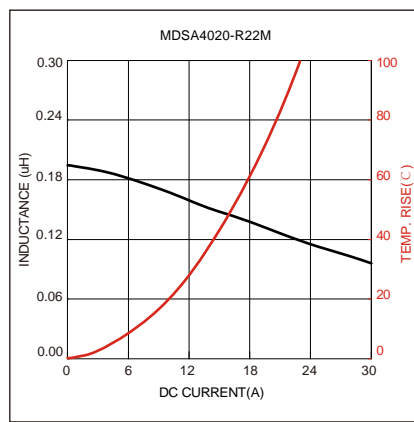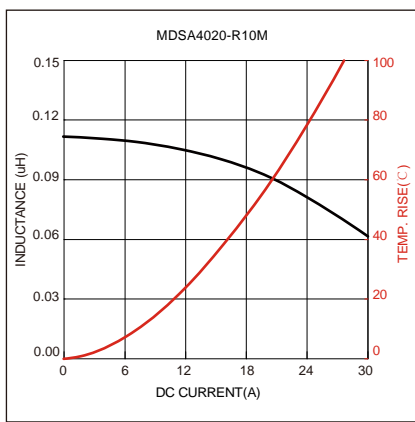

## Typical Electrical Characteristics:

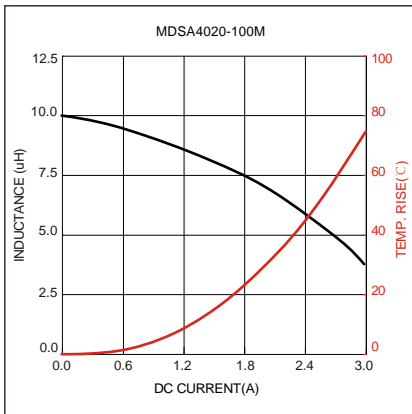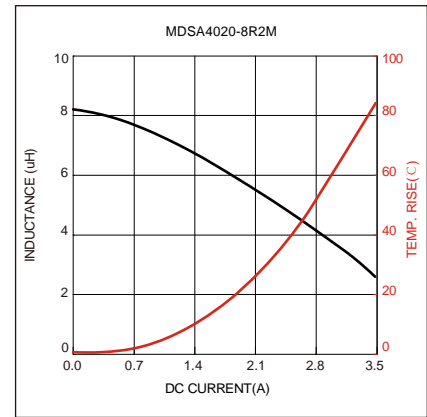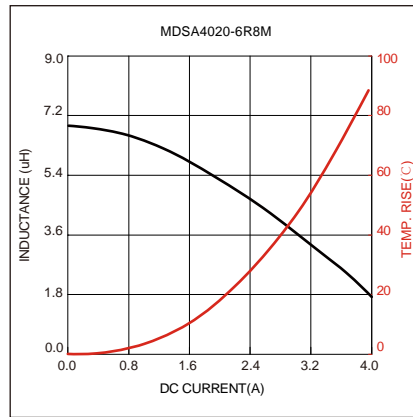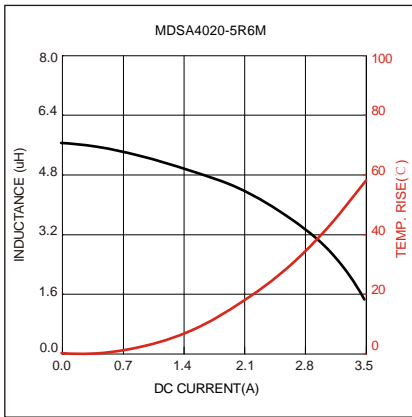

## Soldering Reflow:

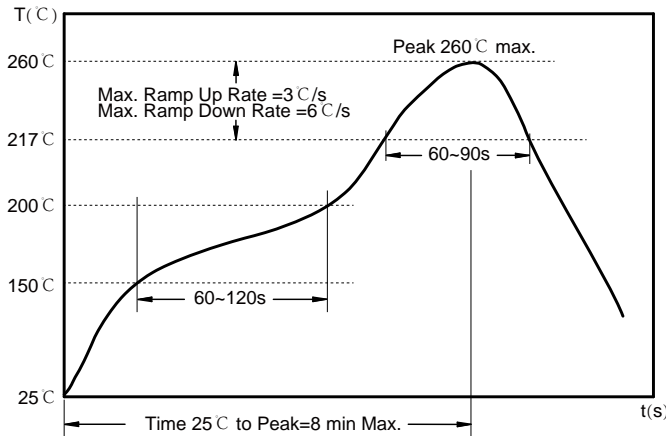

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.


Max temperature: 260°C.

Max time at max temperature: 5 sec.

Allowed Reflow time: 2x max.


## Packaging Information:

### Tape Dimension :

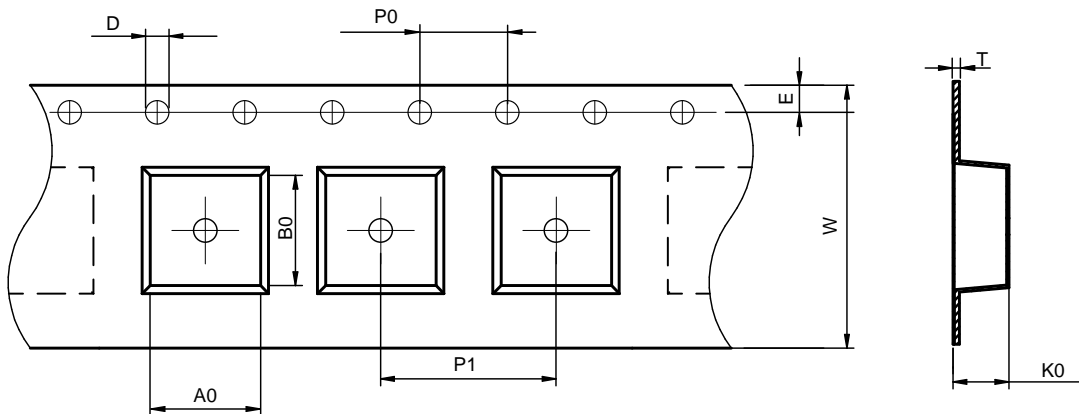

| Series   | A0 (mm)  | B0 (mm)   | D (mm)   | P0 (mm)  | P1 (mm)  | W (mm)    | K0 (mm)  | E (mm)    | T (mm)     |
|----------|----------|-----------|----------|----------|----------|-----------|----------|-----------|------------|
| MDSA4020 | 4.5± 0.1 | 4.85± 0.1 | 1.5± 0.1 | 4.0± 0.1 | 8.0± 0.1 | 12.0± 0.3 | 2.3± 0.1 | 1.75± 0.1 | 0.35± 0.05 |

### Peel force of top cover tape:

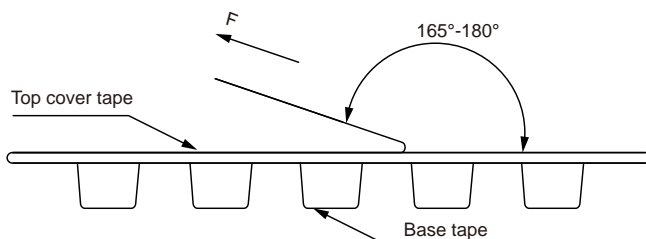


The peel force of top cover tape shall be between 0.1 to 1.3 N


### Product Marking:

|         |                        |
|---------|------------------------|
| Marking | K+Printing Inductance) |
|---------|------------------------|

## Reel Dimension: [mm]

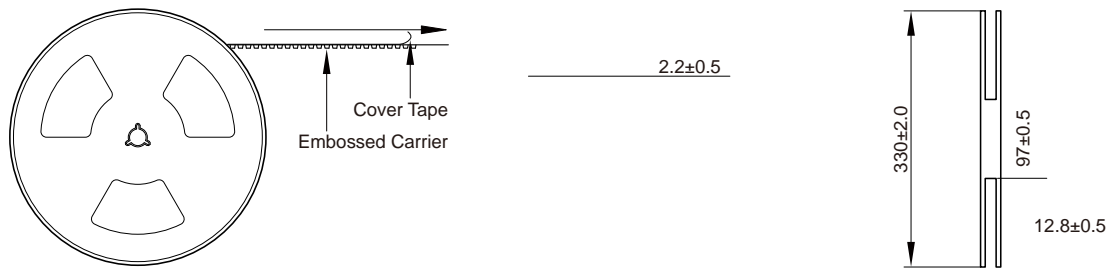

## Packaging Quantity:

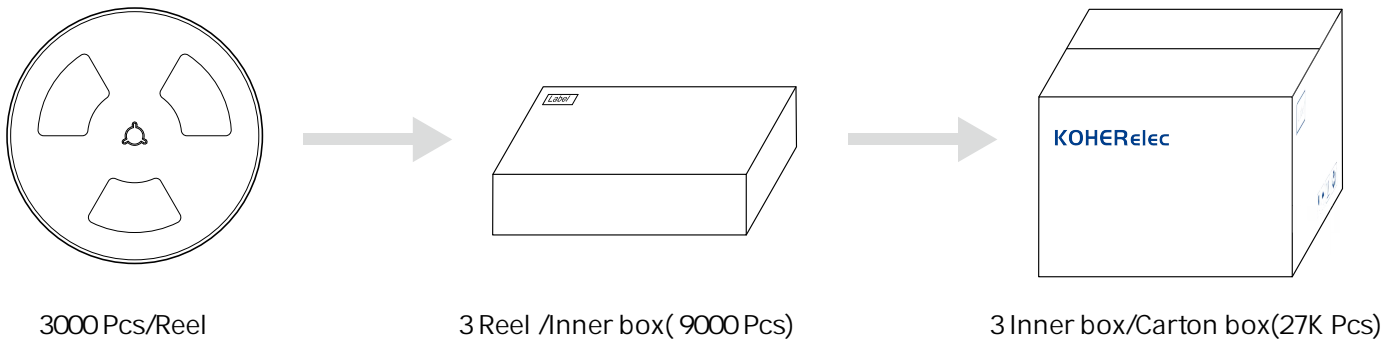

## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.