

# MDTA Series


## FEATURES




- Composite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- High inductance capability and handles high transient current
- C-Q200 qualified
- Operating temperature -55 to +155 °C (Including self - temperature rise)
- Quantity: 1500pcs

## APPLICATION

- DC/DC converters for entertainment/navigation systems
- Applications: windshield power mirrors / heating and ventilation blowers / HID lighting
- LED driv

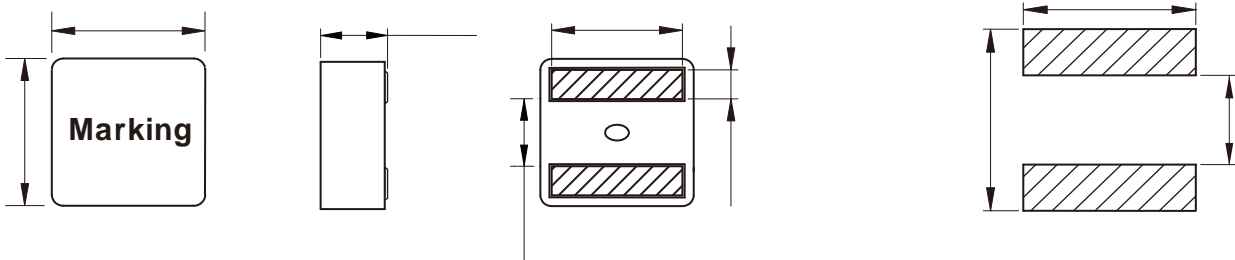

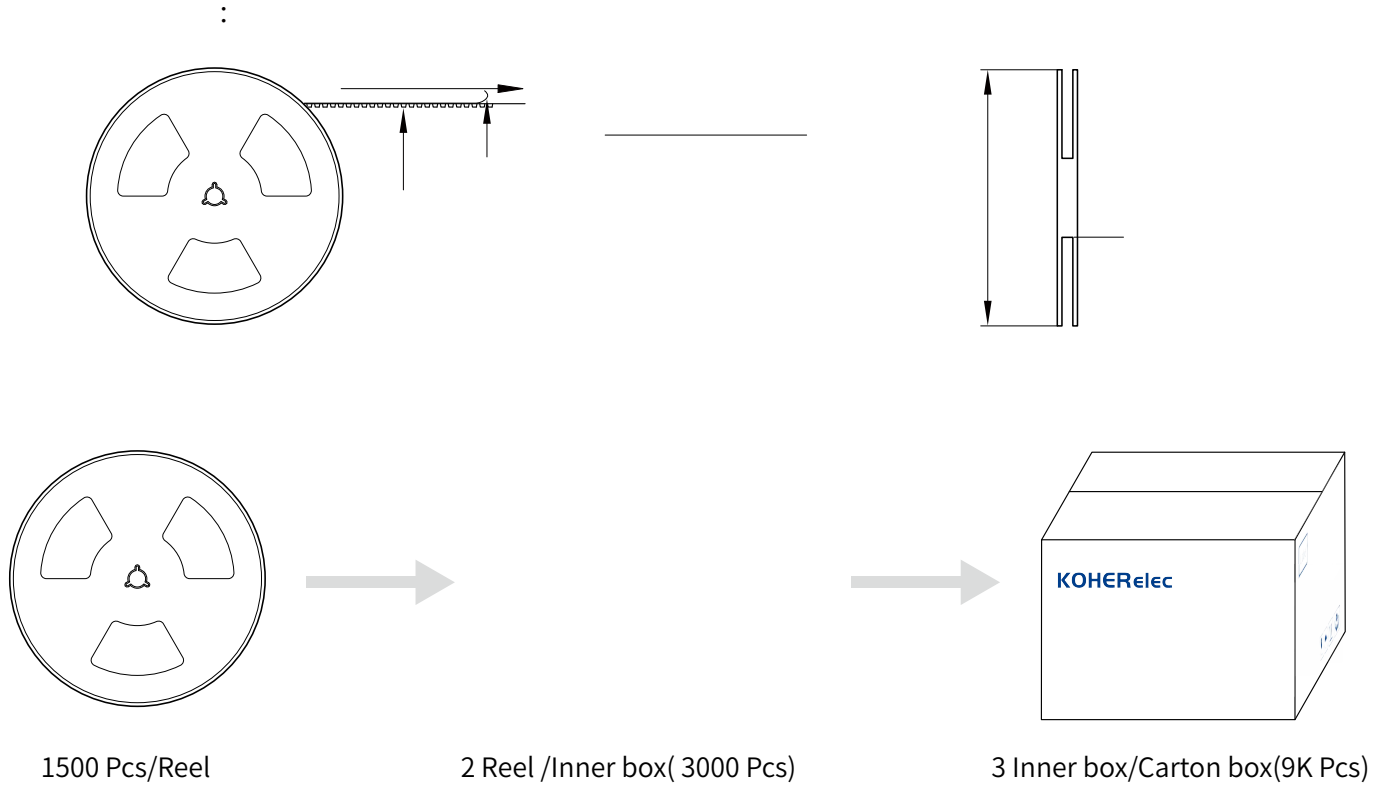

:

- 
- 
- 
- 
- 
- 
- 
- 
-