

WIV Series

Wire Wound Inductor

Size 2520




FEATURES

-
-
-
-
- and RoHS compliant
-
- °C (Including self - temperature rise)
-

APPLICATION

- Filtering of supply voltages, coupling, decoupling
-
-
-

Dimensions: [mm]

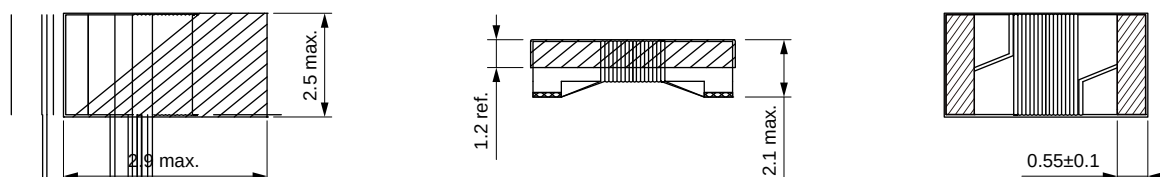

Electrical Properties:

Part No	Inductance	Tolerance	Test Frequency	Q Min.	Test Frequency	Temperature Rise Current Max.	DC Resistance Max.	SRF Min.
WIV2520-1R0K	1.0	±10%	0.5V/7.96M	12	7.96	1000	0.13	345
WIV2520-1R5K	1.5	±10%	0.5V/7.96M	12	7.96	850	0.17	100
WIV2520-2R2K	2.2	±10%	0.5V/7.96M	12	7.96	775	0.21	78
WIV2520-3R3K	3.3	±10%	0.5V/7.96M	12	7.96	715	0.26	48
WIV2520-4R7K	4.7	±10%	0.5V/7.96M	12	7.96	505	0.52	46
WIV2520-6R8K	6.8	±10%	0.5V/7.96M	12	7.96	432	0.72	33
WIV2520-8R2K	8.2	±10%	0.5V/2.52M	12	2.52	410	0.76	30
WIV2520-100K	10	±10%	0.5V/2.52M	12	2.52	392	0.86	28
WIV2520-150K	15	±10%	0.5V/2.52M	12	2.52	342	1.09	21
WIV2520-220K	22	±10%	0.5V/2.52M	12	2.52	260	1.96	18
WIV2520-330K	33	±10%	0.5V/2.52M	12	2.52	236	2.47	15